


## Technical data

<b>Spindle Type</b>	BT40 (BT50 Optional)
<b>Spindle Speed</b>	8000 rpm (Belt Type) 12000 rpm (Direct Drive)
<b>Spindle Motor</b>	15/18.5 kw
<b>Tool Changer</b>	30T Arm Type
<b>Servo Motor</b>	X: 27 N.m Y: 27 N.m Z: 27 N.m
<b>Control System</b>	SIEMENS 828D / FANUC 0iMF plus
<b>Balancing System</b>	Nitrogen Balance
<b>Ball Screw</b>	X: 4010 Y: 4010 Z: 4510
<b>Linear Guides</b>	X: 2*45 mm Y: 2*45 mm Z: 2*45 mm
<b>Number of Wagon</b>	X: 6 Y: 4 Z: 6
<b>Rapid (mm/min)</b>	X: 36000 Y: 36000 Z: 36000
<b>Traverse (mm)</b>	X: 1300 Y: 700 Z: 600
<b>Table size (mm)</b>	1500*650
<b>Maximum Load</b>	800 kg
<b>Machine Weight</b>	9000 kg

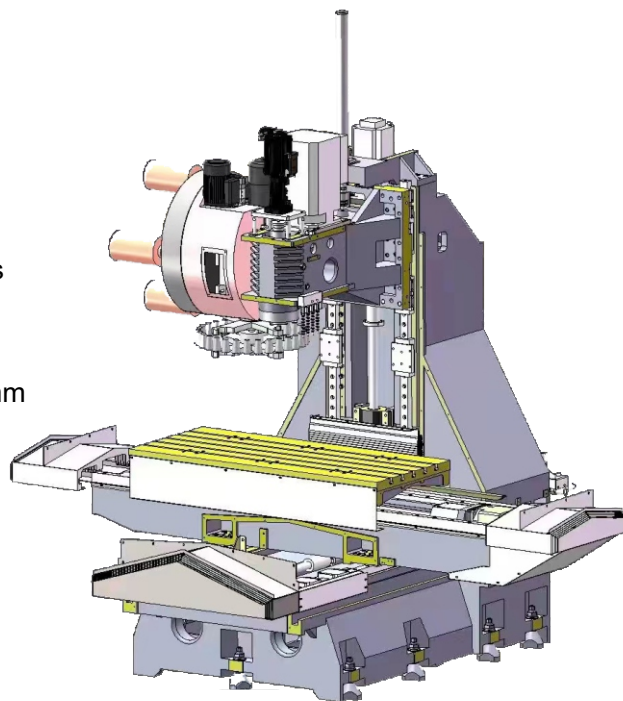

Dimension (L\*W\*H) 3400\*2660\*2520mm