


## Technical data

<b>Spindle Type</b>	BT50
<b>Spindle Speed</b>	6000 rpm (Belt Type)
<b>Spindle Motor</b>	18.5/22 kw
<b>Tool Changer</b>	30T Arm Type
<b>Servo Motor</b>	X: 30 N.m Y: 30 N.m Z: 30 N.m
<b>Control System</b>	SIEMENS 828D / FANUC 0iMF plus
<b>Balancing System</b>	Nitrogen Balance
<b>Ball Screw</b>	X: 5010 Y: 5010 Z: 5010
<b>Linear Guides</b>	X: 2*45mm Y: 4*45mm Z: 2*55mm
<b>Number of Wagon</b>	X: 6 Y: 8 Z: 6
<b>Rapid (mm/min)</b>	X: 24000 Y: 24000 Z: 24000

<b>Traverse (mm)</b>	X: 1550 Y: 850 Z: 850
<b>Table size (mm)</b>	1700*850
<b>Maximum Load</b>	1600 kg
<b>Machine Weight</b>	13500 kg

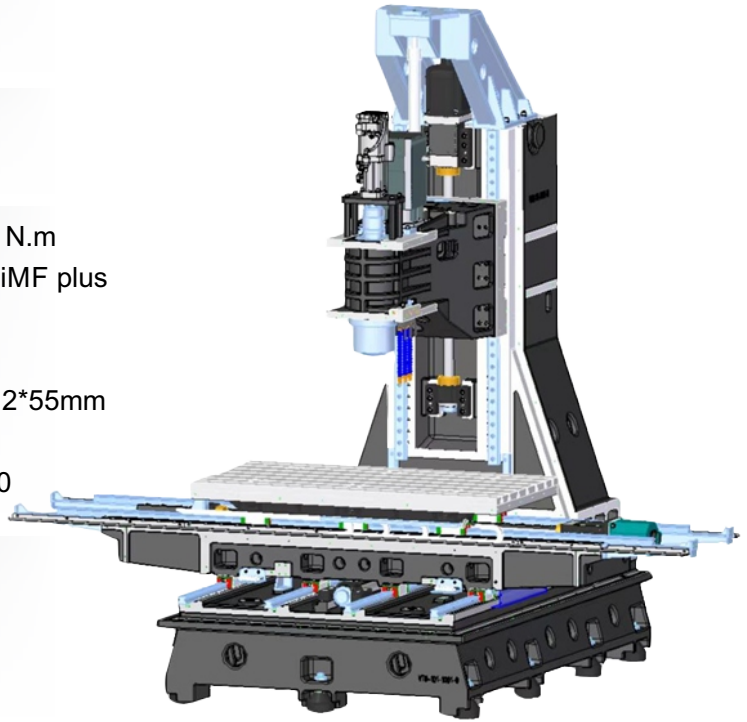

Dimension (L\*W\*H) 3600\*3300\*3000mm