


## Technical data

<b>Swing Over Bed</b>	670 mm
<b>Swing Over Slide</b>	440 mm
<b>Work Length</b>	1000 mm

<b>Spindle Hole / Bore</b>	Ø 87/75 mm (100/87 mm Optional)
<b>Spindle Speed</b>	3000 rpm (Belt Type)
<b>Spindle Type</b>	A2-8 (A2-11 Optional)
<b>Spindle Motor</b>	15/20 kw
<b>Turret Type</b>	12 Position
<b>Turret Tools</b>	BMT45 / BMT55 / BMT65
<b>Servo Motor</b>	X:12 N.m Z: 20 N.m

<b>Control System</b>	SIEMENS 808D/828D / FANUC 0iTF Plus
<b>Ball Screw</b>	X: 3210 Z: 4012
<b>Linear Guides</b>	X: 2*45 mm Z: 2*45 mm
<b>Rapid (mm/min)</b>	X: 20000 Z: 24000
<b>Live Tools / C Axis</b>	Optional (PRO)

<b>Axis Traverse (mm)</b>	X: 460 Z: 1000 / 1500
<b>Tail Stock Dia/Travel</b>	Ø100/970 mm
<b>Machine Weight</b>	6500 kg (7500 kg Optional)

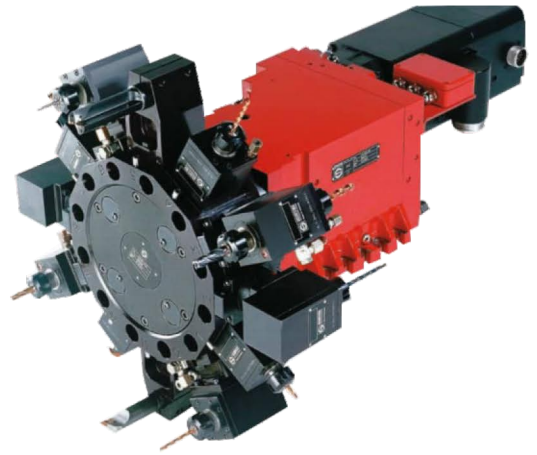

**Dimension (L\*W\*H) 2800\*1800\*1900mm**