


Technical data

| | |
|------------------------------|--|
| Spindle Type | BT50 |
| Spindle Speed | 6000 rpm (Belt Type) |
| Spindle Motor | 15/18.5 - 18.5/22 Kw |
| Tool Changer | 24/32T Arm Type (40 T Optional) |
| Servo Motor | X: 35 N.m Y: 35 N.m Z: 35N.m |
| Control System | SIEMENS 828D / FANUC 0iMF plus |
| Rapid (mm/min) | X: 48000 Y: 36000 Z: 48000 |
| Cutting Rate (mm/min) | X: 10000 Y: 10000 Z: 10000 |
| Workpiece to spindle | MH 630 : 100-950 mm MH 800 : 80-1080 mm |
| Positioning Accuracy | 0.003 mm |
| Traverse MH630 (mm) | X: 1000 Y: 800 Z: 800 |
| Traverse MH800 (mm) | X: 1250 Y: 1000 Z: 1000 |
| Table size (mm) | 630*630 / 800*800 |
| Maximum Load (kg) | 1200 / 2000 |
| Machine Weight (kg) | 13000 / 17000 |

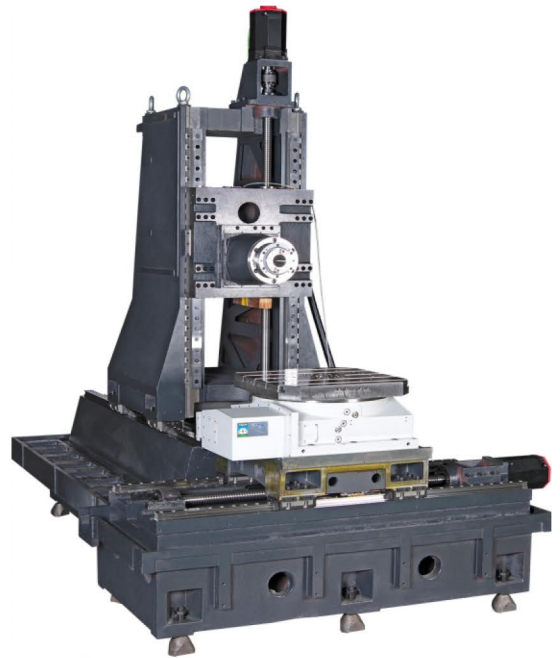

Dimension (L*W*H) 5200*4000*3350 mm