


Technical data

| | |
|-------------------------|--|
| Spindle Type | BT40 (BT50 Optional) |
| Spindle Speed | 8000 rpm (Belt Type) 12000 rpm (Direct Drive) |
| Spindle Motor | 15/18.5 kw |
| Tool Changer | 24T Arm Type (30T Optional) |
| Servo Motor | X: 27 N.m Y: 27 N.m Z: 27 N.m |
| Control System | SIEMENS 828D / FANUC 0iMF plus |
| Balancing System | Nitrogen Iron Balance |
| Ball Screw | X: 4010 Y: 4010 Z: 4010 |
| Linear Guides | X: 2*45 mm Y: 4*45 mm Z: 2*45 mm |
| Number of Wagon | X: 6 Y: 8 Z: 6 |
| Rapid (mm/min) | X: 24000 Y: 24000 Z: 24000 |
| Traverse (mm) | X: 1400 Y: 700 Z: 700 |
| Table size (mm) | 1500*700 |
| Maximum Load | 1200 kg |
| Machine Weight | 11000 kg |

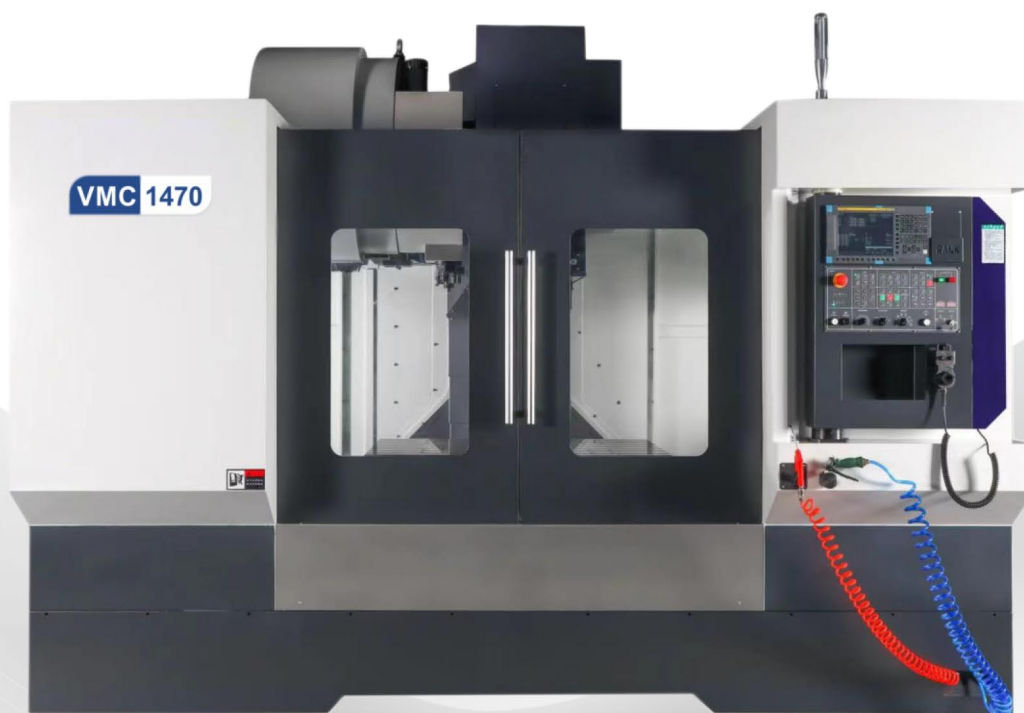

Dimension (L*W*H) 3400*2660*2520mm